


AFD1200AC Marine Watermaker 218Ltr/Hr

240v Single Phase

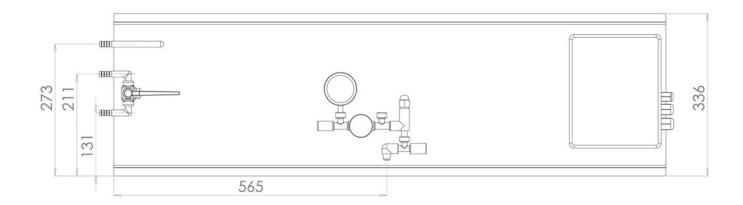

Features

- · High Quality High-Pressure Pump & Direct Drive Motor
- High Quality Low Pressure Boost Pump included.
- LCD Graphical Touchscreen Control
- LCD Digital Salinity Monitor
- · Reliable PLC Control Unit
- Auto Divert Valve for Product Water
- · Low Pressure Safety Shut-Off
- High Pressure Safety Relief
- Fresh Water Flush System
- 30 & 5 Micron Pre-Filter System
- · Precision Product Flow Gauge
- · Low and High Pressure Gauges
- Product Water Sample Port
- Tank Full Indication and Stop (optional tank switch required)
- Supplied with Custom Length HP Hoses (if required)
- Easy Servicing and Parts Availability
- Low Maintenance Costs
- Robust Design





AFD1200AC

Aquafresh Watermakers are hand built in the U.K and individually tested to ensure each one meets the performance requirements for volume and quality of potable water.

Every watermaker undergoes a stringent test programme to guarantee that your Aquafresh conforms to the highest standards and is delivered in perfect condition.

All of the components used on our watermakers are selected for practicality, corrosion resistance, availability and ease of replacement anywhere in the world. Quite simply your Aquafresh Watermaker has been designed and engineered with robust reliability in mind, continually supplying high quality freshwater year after year.

Our rejection and recovery rates are amongst the very best in the industry, something that our competitors often fail to mention.

Watermaker Specification AFD1200AC

Main Panel:

Length 1143mm

Height 337mm

Depth 251mm

Total Weight 80.5kg

AC Voltage 230vAC 50/60Hz

AC Power Requirement (running) 12Amps/240vAC running (inrush 3-5x greater)

Water Production Rates*:

Litres / Hour 218

UK Gallons / Hour 47.9

US Gallons / Hour 57.6

Rejection Rate (salt) 99.14%


Recovery Rate (potable water) 18.97%


Whats Included:


Watermaker Owners Manual
HP Pump 3m HP Hose
LP Pump Remote Panel
Pre Filter Housing Filter Spanner

Operators Manual 5 & 30 Micron Filters 5m Remote Cable


Standard PreFilter Housing










^{*}Production rates (+/- 15%) based on feed water of 25°C, 35000ppm @900psi

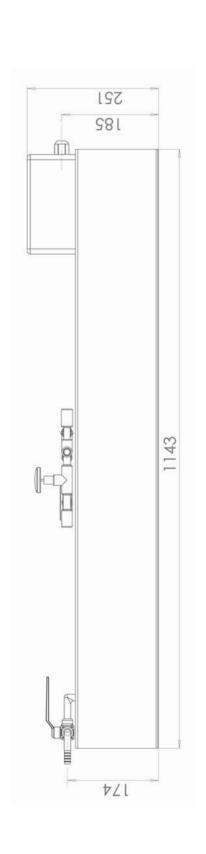

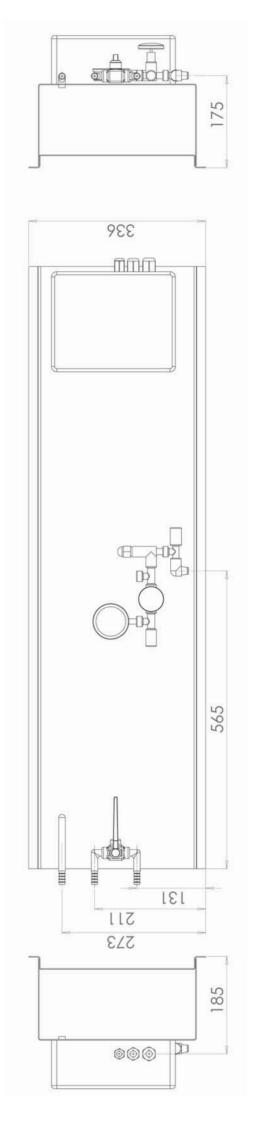



HP Feed Pump

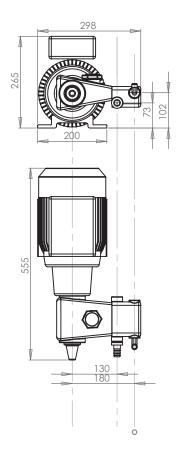




LP Boost Pump








Remote Panel

Cutout for Panel 101mm x 69mm

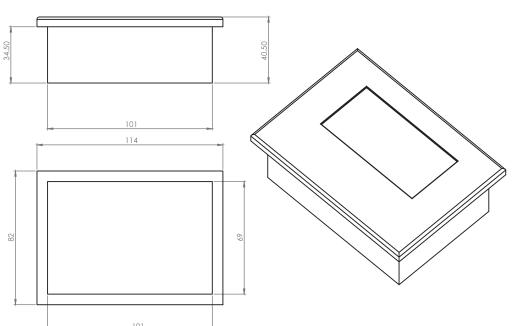

Aquafresh Watermakers Ltd. Western Wood Way Langage Science Park Plymouth Devon PL7 5BG U.K

Tel: +44 1752 208810 Fax: +44 1752 208811

info@aquafreshwatermakers.com